

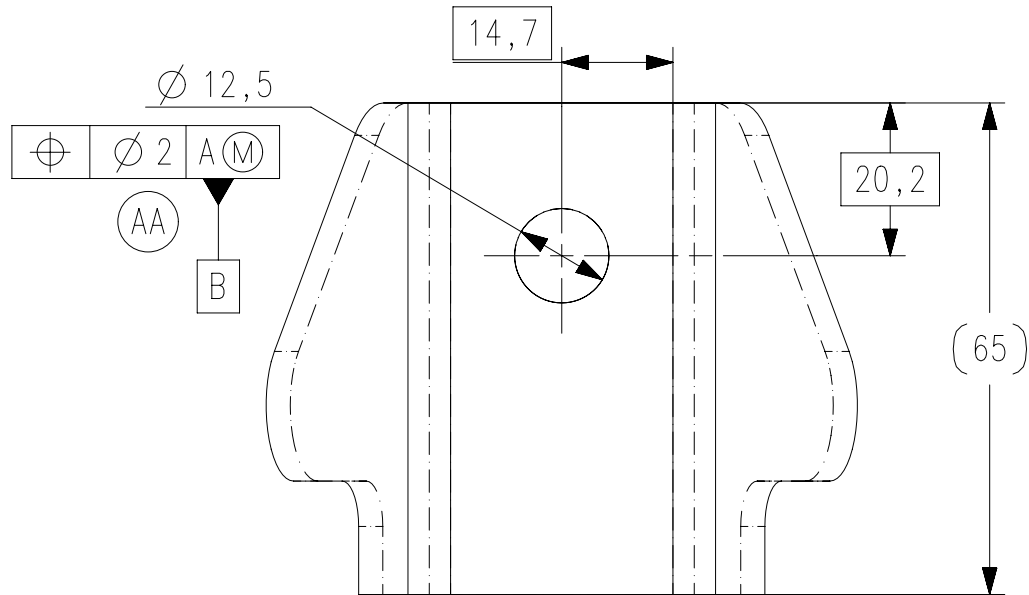


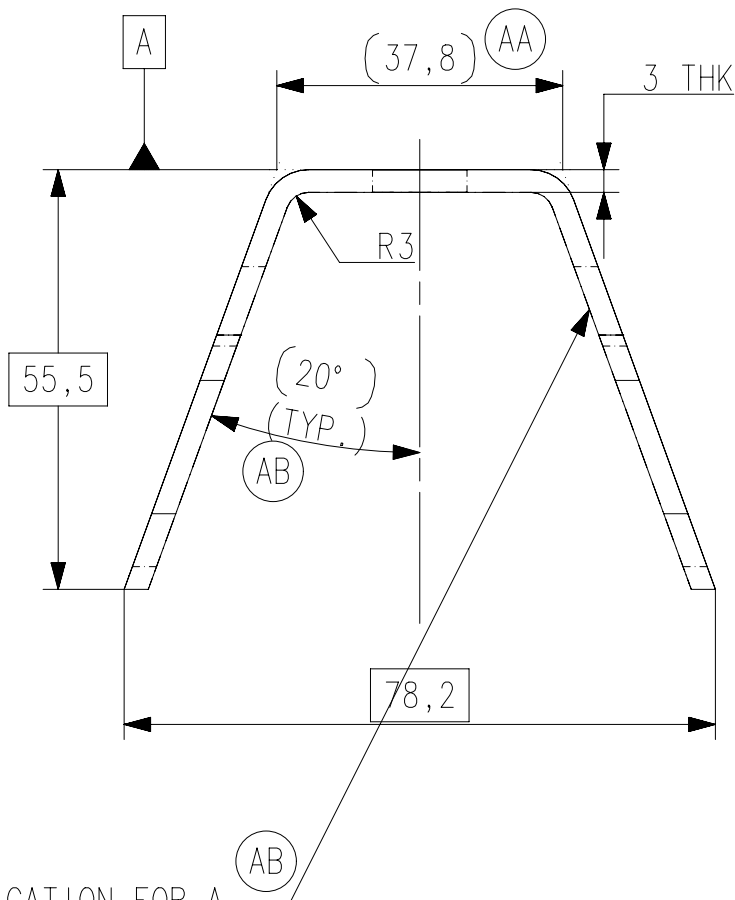

NOTE :-

- 1.THE IGES/UG GENERATED MATHEMATICAL DATA IS MASTER FOR THE PART
- 2.ALL UNSPECIFIED RADIUS SHOULD BE ONE METAL THICKNESS.
- 3.PART MUST BE FREE OF STRETCHING, SCORING MARKS AND WRINKLES.
- 4.PART MUST BE FREE OF FRACTURE, BURRS & SHARP EDGES AND ANY SURFACE IMOERFACTIONS, THAT MAY AFFECT FIT OR FUNCTION OF THE PART.
- 5.DEVELOPMENT LENGTH:- 145X65X3

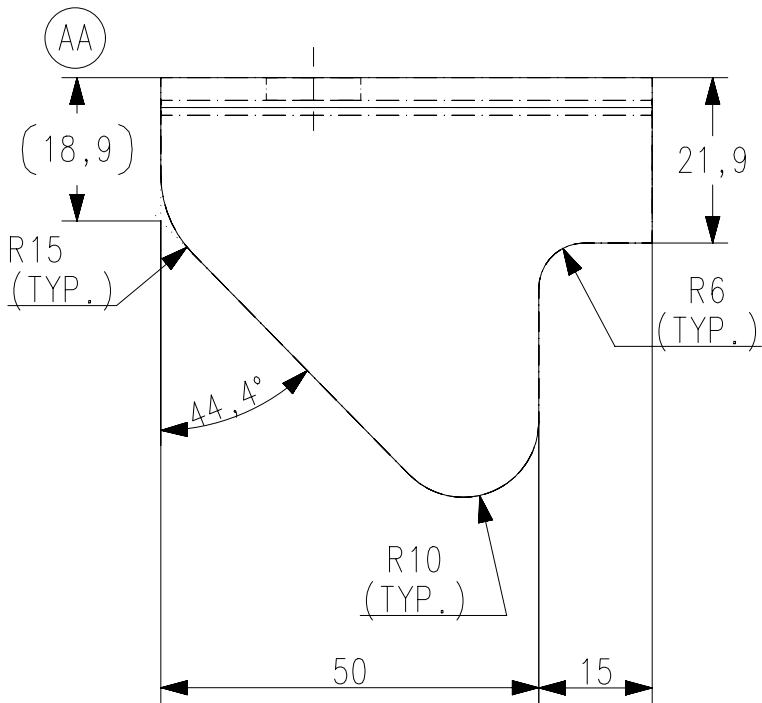

"F" - MARK IDENTIFICATION FOR A MIN HEIGHT OF 10mm INSIDE THE SURFACE FOR REFERENCE ONLY NOT FOR MEASUREMENT PURPOSE


<SC> :SIGNIFICANT CHARACTERISTICS ▽ :CRITICAL CHARACTERISTICS

BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONING AND TOLERANCEING IS IN ACCORDANCE WITH ASME Y14.5-2009

UNTOLERANCED DIMENSIONS ARE BASIC -



MAHINDRA & MAHINDRA LIMITED
TRACTOR DIVISION
KANDIVLI (EAST), MUMBAI 400 101, INDIA.

E.R. / PROC.REQ.NO :
ER19C0005837

PART NO. :
007637735U1

PART NAME :
HAT SECTION - FRONT

MATERIAL :
MFD 11D, 3 MM THK AS PER
M&M STD FE G 00 0689-HRPO

HEAT TREATMENT :

	NAME	SIGN	DATE	FIRST USED TRCR. MODEL
CAD ENGG.	HARI		06/12/2017	MSTAR P2
DESIGNER	HARI		06/12/2017	SCALE 1 : 1
CHECKER	TVK		06/12/2017	SHEET 1 OF 1
APPR.BY	VB		06/12/2017	UNIT QTY. : 6/TR
				WEIGHT : 0.165 kg.

ECN19P004248	AB		TOLERANCE UPDATED AS PER CMM FEEDBACK.	HARI	TVK	VB	11/03/19
ECN19P004158	AA		PART REDRAWN, REFERENCE DIMENSION ADDED & WEIGHT & TOLERANCE UPDATED AS PER CMM FEEDBACK, PART UPDATED	HARI	TVK	VB	31/01/19
E.R.NO.	LET	LOC	REVISIONS	DSNF	CKR.	APPR.	DATE

COMPUTER GENERATED DRAWING DO NOT CHANGE MANUALLY

IF IN DOUBT, ASK DO NOT SCALE DRG SIZE : A3

ALL DIMENSIONS ARE IN mm. CHECK DRG WITH LATEST CHANGE No